

YOUR PROTECTION
BY EXCELLENCE

RIPAFLAM
HEAT PRODUCTION SET





Ripaflam is used where instant flame or high heat is required, continuous or intermittent (flaming, warming up or drying of various parts before treatment or painting, trimming of plastic parts, shrinking of plastic films, plucking of poultry....etc).

Ripaflam can be fitted directly on any existing system (fixed structure, robot, conveyor...). The various components can be positioned according to the assembly needs.

Cycles start and stop are automatic and can be easily controlled. The RIPAFLAM® can be integrated into an automated production process for a need of high, instant and adjustable heat production. It works either on a natural gas flow or on a bottle of LPG.

System controlled by an electronic item monitoring for opening and closing the gas electro-valve, and checking for flame.

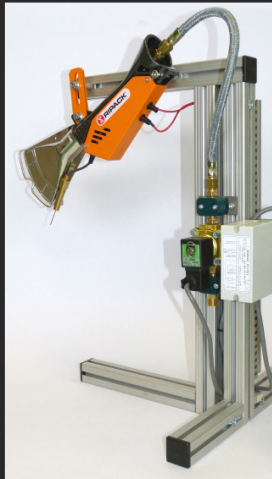

TECHNICAL SPECIFICATIONS

Maximum power developed	55 kW nat.gas or 76 kW LPG
Temperature at 30 cm (12")	450°C / 840°F
Rotating flame	Maxi length 200 mm (8")
Body + burner (LxWxThick.)	380 x 150 x 70 mm 15" x 5.9" x 2.8"
Body of burner	Molded aluminum
Combustion nozzle	Stainless steel
Electric supply	220 VAC (single phase)